

Everon® Copper Datacom E250 Flex OCK6F8, E250FWH Jack, RJ45 Vol, Cat6, Bag/8, White

CORNING

Part Number:
UU001520574

Our Cat.6 copper interconnect products work together to provide an easy-to-use solution for deploying high-speed connections throughout a building. The RJ45 jack is a key component in this system. The jack's unique two cable entry points help make installation simple. The traditional one-click design enables an easy, tool-less termination on unshielded twisted pair cables, meeting industry performance standards.

Features and Benefits

Tool-less jack

Easy and quick to install - reliable connection
The conductors are wired in a single operation

Two cable entry points

Less cable bending required - better compliance with minimum bend radius. Enables a wide range of cable routing options. Easy to use in tight spaces

Reusable

Jack can be reused even after wiring mistake

Clip-in mounting

Designed to fit many other accessories

Accepts solid and stranded conductors

Enables "jack-to-plug" cables to be manufactured using stranded conductors

Integral shutter


No additional shuttering required on faceplates

No untwisting of pairs before termination

Minimized stripping length - limited pair untwist - pairs kept together, no wire guide required

PoE Applications

Supports Power over Ethernet (PoE / PoE+)

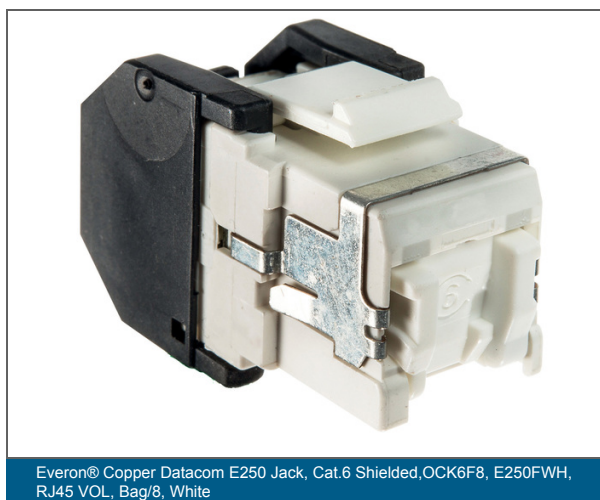

Everon® Copper Datacom E250 Jack, Cat.6 Shielded, OCK6F8, E250FWH, RJ45 VOL, Bag/8, White

Everon® Copper Datacom E250 Flex OCK6F8, E250FWH Jack, RJ45 Vol, Cat6, Bag/8, White



Specifications

General Specifications	
Category	6
Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	ISO/ IEC 11801 Edition 2. Arm 1-2,EN 50173-1 : 2011,ANSI/ TIA/ EIA-568-C.2-2009,ISO 60512-99-01
Design And Test Criteria	IEEE 802.3 1GBASE-T, IEEE 802.3at
Environmental Conditions	
Temperature range, operation	-10 °C to 60 °C
Design	
Jack Type	RJ45 - 8/8
Housing material	Plastic
Colour	White
Insulation diameter max.	1.6 mm
Conductor	AWG 26 - 22
Number of Stranded Wires	7
Mechanical Specifications	
Contact surface	Gold, 1.6 µm
Solid Wire Diameter	5 mm to 65 mm
Stranded Wire Diameter	15 mm to 2 mm

Everon® Copper Datacom E250 Flex OCK6F8, E250FWH Jack, RJ45 Vol, Cat6, Bag/8, White



Electrical Specifications	
Lead Through Resistance	< 200
Insulation resistance	> 500 MΩ
Voltage Rating (Maximum)	<75

Dimensions	
Height	23 mm
Width	18 mm
Depth	34 mm

Ordering Information	
Product Number	UU001520574
Packaging method	Bag of 8 / 1 Box
Shipping weight	124 kg
Units per delivery	96/1



Equinsa Networking | eqnw.es | eqnw@equinsa.es

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2024 Corning Optical Communications. All rights reserved.

