

EDGE8® Port Breakout Module 8F, LC Duplex to 3 m LSZH™/FRNC Interconnect MTP® (pinned), Bend-improved single-mode (OS2), Type B

CORNING

Part Number:
ECM8-04E7-GEZB-003M

EDGE8™ MTP® port breakout modules enable conversion from a single 4-channel parallel optic port (such as 40GSR4 (QSFP)), into a patch panel representation with four LC duplex ports.

Features and Benefits

VFL-compatible shuttered LC adapters

Creates one-hand operation and decreases time needed to test and troubleshoot a link

Rear-loading capability

Decreases the time to prepare and install modules into fibre housings

High density


Module enables 576 fibres in a 4U housing and 144 fibres in a 1U

Low insertion loss performance

Improved performance specs allow for more mated pairs and/or longer link distances

Corning® CleanAdvantage™ technology and optimised dust cap

Eliminates the need for scoping and cleaning prior to initial field connection

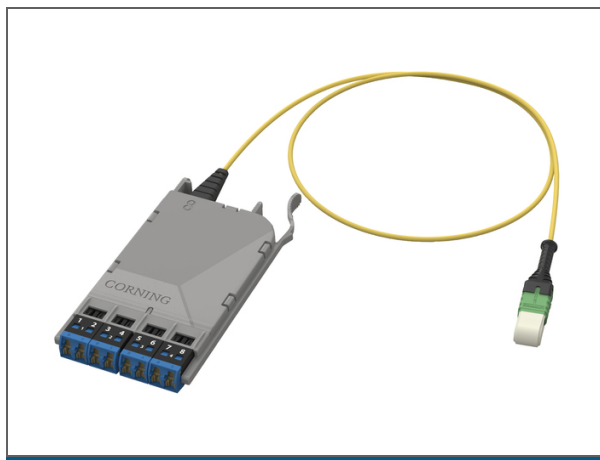

EDGE8® Port Breakout Module 8F, LC Duplex to 3 m LSZH™/FRNC Interconnect MTP® (pinned), Bend-improved single-mode (OS2), Type B

CORNING

Specifications

Ordering Information

Product Number	ECM8-04E7-GEZB-003M
EAN Code	4056418044835
Package contents	Port Breakout Modules packaged in individual plastic bags
Units per delivery	1/1

Design

Housing type	Panels and Modules
--------------	--------------------

General Specifications

Product type	Panels and Modules
Cable type	Interconnect
Application	Data Centre LAN/SAN

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: +49 30 5303 2335 • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2021 Corning Optical Communications. All rights reserved.