

EDGE8™ MTP® to LC Duplex Module

8F, 50 µm multimode (OM4)

CORNING

The internal wiring of EDGE8 MTP to LC modules based on universal polarity ensures the correct fibre polarity throughout the entire system independent of how many modules are implemented within the link. Ultra low-loss connectivity enables design flexibility to permit multiple potential connections within the system (e.g. 6-module link).

Features and Benefits

Shuttered adapters

Creates one-hand operation while eliminating the need to remove and store dust caps

VFL-compatible shutters

Decreases time needed to test and troubleshoot a link

Key identifiers

"8" on the module for easy identification as a Base-8 component

Rear-loading capability

Decreases the time to prepare and install modules into fibre housings

High density


Module enables 576 fibres in a 4U housing and 144 fibres in a 1U

Low insertion loss performance

Improved performance specs allow for more mated pairs and/or longer link distances

Universal wiring

Decreases complexity and risks associated with managing polarity during moves, adds and changes

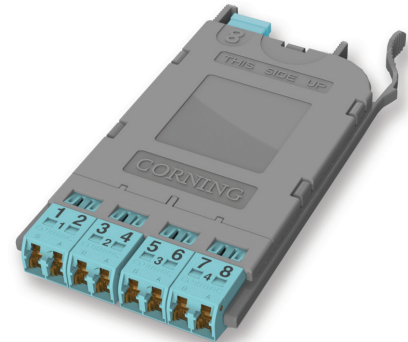

EDGE8 MTP to LC Duplex Module | Photo REN389



EDGE8 MTP to LC Duplex Module | Photo REN424

EDGE8™ MTP® to LC Duplex Module

8F, 50 µm multimode (OM4)

CORNING

Specifications

General Specifications

Application	Data Centre LAN/SAN
Product type	Panels & Modules
Fibre Category	50 µm MM (OM4)

Design - Hardware

Fibre Count	8
Number of adapters per panel	4 LC Duplex and 1 MTP
Adapter Type Front	Shuttered LC
Adapter Colour Front	Turquoise
Adapter Type Back	MTP
Adapter Color Back	Turquoise
Connector Type	MTP® (non-pinned)
Panel or Module Type	EDGE8™

Optical Specification - Hardware

Module Insertion Loss, Max	0.35 dB
Wavelengths	850 nm / 1,300 nm

Design - Connector A

Connector Type	MTP® (non-pinned)
Ferrule Material	Composite

Design - Connector B

Connector Type	LC Uniboot
Ferrule Material	Ceramic

Cable design

Fibre Count	8
Polarity	Universal

EDGE8™ MTP® to LC Duplex Module

8F, 50 µm multimode (OM4)

CORNING

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

Ordering Information

Part Number	ECM8-UM08-05-E6Q-ULL
Product Description	EDGE8™ MTP® to LC Duplex Module, 8F, 50 µm multimode (OM4)
EAN Code	4056418036076
Weight	0.09 kg (0.2 lb)

Shipping Information

Units Per Delivery	1/1
Package Contents	Modules packaged in individual blister packs



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY

00 800 2676 4641 · FAX: +49 30 5303 2335 · www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2016 Corning Optical Communications. All rights reserved.