

Central Tube Dielectric Armour Indoor/Outdoor Cable 1x2 G50 MMF ClearCurve® OM3 CT 3.0

CORNING

Part Number:
002TEU-13188A2G

The central tube cable construction, by isolating the fibres from installations and environmental rigors, provides stable and highly reliable transmission parameters. The fibres in are color coded for quick, easy identification. Based on a central buffer tube cable construction, is very compact, light and flexible, and ideal for connections requiring a moderate fibre count. These cables are designed for installation in conduits, ducts and in-house.

Features and Benefits

All-dielectric cable construction

Requires no grounding or bonding

Laminated swelling glass yarns

Improved rodent resistance and longitudinal water protection

UV- and microbe-resistant

Can be installed in ducts or conduits

Small diameter and bend radius

Easy installation in space-constrained areas

Fibres colour coding to Telcordia-Bellcore

Easy identification of the individual fibres

Waterblocking technology


OSP (outdoor) applications

Silicon-free outer jacket

The cable jacket is free of harmful to paint structures

Flame retardant

LSZH/FRNC

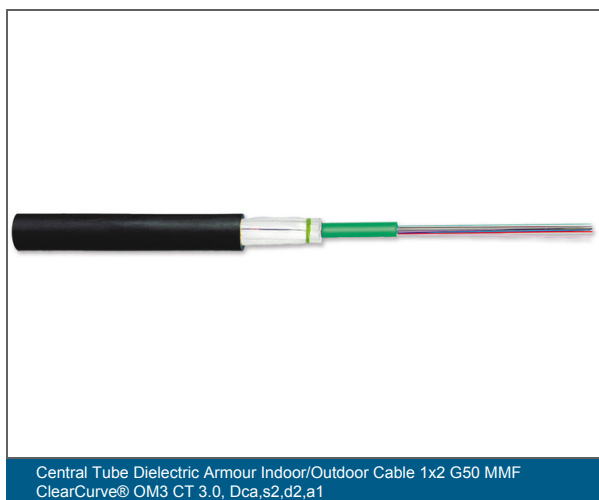

Central Tube Dielectric Armour Indoor/Outdoor Cable 1x2 G50 MMF ClearCurve® OM3 CT 3.0

CORNING

Specifications

General Specifications

Cable type	Central Tube
Environment	Indoor/Outdoor
Product type	Dielectric armour
Fibre category	50 µm MM (OM3)
Flame rating	LSZH/FRNC
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	U-DQ(ZN)BH
Application	Duct, General purpose, Horizontal, Vertical Riser
Fibre count	2
Cable geometry	Round

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Waterblocking	IEC 60794-1-22 Method F5B
Flame propagation test	Flame retardant according to IEC 60332-1-2 (single cable) and IEC 60332-3-24 (bunch of cables)
Reaction to fire requirements	Reaction to fire according to EN 50575 and EN 13501-6
Smoke density	Low Smoke to IEC 61034
Halogen content test	Zero Halogen according to IEC 60754-1
Level of corrosion	Non-corrosive according to IEC 60754-2
Reaction to fire	Dca, s2, d2, a1

Environmental Conditions

Temperature range, installation	-5 °C to 50 °C
Temperature range, operation	-20 °C to 60 °C
Temperature range, storage	-25 °C to 70 °C

Central Tube Dielectric Armour Indoor/Outdoor Cable 1x2 G50 MMF ClearCurve® OM3 CT 3.0

CORNING

Cable Design

Cable marking	"Metre - Handset - CE 17 EN 50575 Dca,s2,d2,a1 - Sine - CORNING - Fiber Optic Cable - Year - U-DQ(ZN)BH 2 OM3CC CT 3.0 LSZH(TM)/FRNC"
Fibre count	2
Number of ripcords	1
Outer jacket colour	Black
Outer jacket material	Flame-retardant, non-corrosive/low-smoke, zero-halogen (FRNC/LSZH) material
Outer jacket nominal thickness	1.2 mm
Tensile strength elements and/or armouring - Layer 1	Laminated swelling glass yarn armour
Buffer tube diameter	3 mm
Fibre colouring	Blue, orange
Fibres per tube	2

Mechanical Specifications

Crush resistance	1500 N/10 cm
Max. tensile strength for installation	1000 N
Min. bend radius installation	130 mm
Min. bend radius operation	100 mm
Nominal outer diameter	6.6 mm

Optical Characteristics

Fibre code	T
Fibre name	G50/125 ULTRA-BEND 7.5
Fibre Type	Multimode
Fibre core diameter	50 µm
Minimum effective modal bandwidth (EMB)	2000 MHz*km / -
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Min. overfilled launch (OFL) bandwidth	1500 MHz*km / 500 MHz*km

Equinsa
Networking

Central Tube Dielectric Armour Indoor/Outdoor Cable 1x2 G50 MMF ClearCurve® OM3 CT 3.0

CORNING

Optical Characteristics

Serial 1 gigabit ethernet	1100 MHz*km / 600 MHz*km
Serial 10 gigabit ethernet	300 MHz*km/ 333 MHz*km
Typical attenuation	2.4 dB/km / 0.8 dB/km
Wavelengths	850 nm / 1300 nm
Induced Attenuation	For 7.5 mm radius < 0.2 db / -
Fibre category	OM3

Dimensions

Cable Weight	46 kg/km
Max. cable length per reel/drum	4000 m



Equinsa Networking S.L.U.

Mail: eqnw@equinsa.es - Web: eqnw.es

Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2017 Corning Optical Communications. All rights reserved.