

FREEDM® Tight Buffer Indoor/Outdoor Cable 8F G50 MMF ClearCurve® OM4 0.9mm TB3, Cca- s1,d1,a1

CORNING

Part Number:
008T8X-32198E2H

Corning® MPC (multipurpose cable) tight -buffered cables are flame -retardant, indoor/outdoor cables designed for interbuilding and intrabuilding backbones in duct and ri-ser applications. The tight -buffered construction facilitates easier termina-tion for low -fiber -count applications in the local area net-work (LAN) and eliminates need for fan -out kits. These cables are designed for installation in conduits, ducts and in -house.

Features and Benefits

Waterblocking technology

OSP (outdoor) applications

All-dielectric cable construction

Requires no grounding or bonding

UV- and microbe-resistant

Can be installed in ducts or conduits

Dry cable core by means of water swellable elements

Allows efficient and craft-friendly cable preparation in outdoor or indoor/outdoor applications

Small diameter and bend radius

Easy installation in space-constrained areas

TB3 tight buffered construction


Easy and consistent stripping up to 10 cm

Flame retardant


LSZH/FRNC

Silicon-free outer jacket

The cable jacket and the outer jacket of subunits (not valid for 900 µm tight buffers) are free of harmful components to paint structures

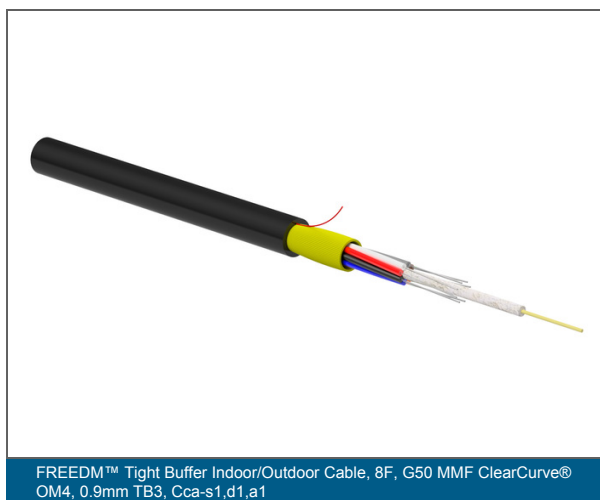

FREEDM™ Tight Buffer Indoor/Outdoor Cable, 8F, G50 MMF ClearCurve® OM4, 0.9mm TB3, Cca-s1,d1,a1

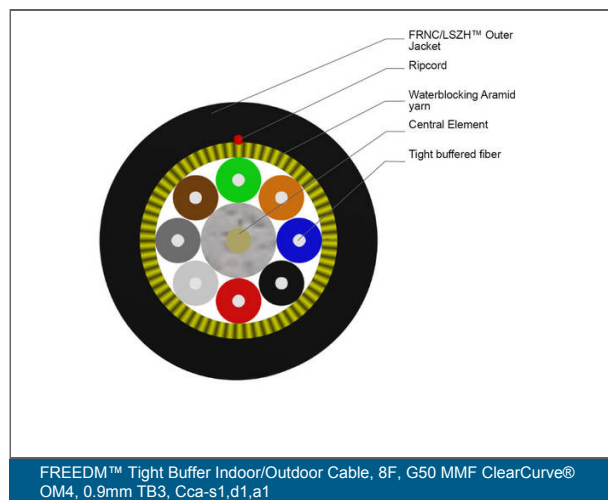

FREEDM™ Tight Buffer Indoor/Outdoor Cable, 8F, G50 MMF ClearCurve® OM4, 0.9mm TB3, Cca-s1,d1,a1

FREEDM® Tight Buffer Indoor/Outdoor Cable 8F G50 MMF ClearCurve® OM4 0.9mm TB3, Cca- s1,d1,a1

CORNING

Specifications

General Specifications

Cable Type	Tight-Buffered
Product Type	Dielectric
Fiber Category	50 µm MM (OM4)
Flame Rating	LSZH/FRNC
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	U-VQ(ZN)H
Fiber Count	8

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Waterblocking	IEC 60794-1-22 Method F5B
Flame propagation test	Flame retardant according to IEC 60332-1-2 (single cable) and IEC 60332-3-24 (bunch of cables)
Reaction to fire requirements	Reaction to fire according to EN 50575 and EN 13501-6
Smoke density	Low smoke according to IEC 61034
Halogen content test	Zero Halogen according to IEC 60754-1
Level of corrosion	Non-corrosive according to IEC 60754-2
Reaction to fire	Cca, s1a, d1, a1

Environmental Conditions

Temperature Range, Installation	-5 °C to 50 °C
Temperature Range, Operation	-20 °C to 60 °C
Temperature Range, Storage	-25 °C to 70 °C

Cable Design

Cable Marking	"Meter - Handset - CE 23 EN 50575 Cca-s1,d1,a1 - Sine - CORNING - Fiber Optic Cable - Year - FREEDM(TM) U-VQ(ZN)H 8 OM4CC TB3 0.9 LSZH(TM)/FRNC"
---------------	--

Equinsa
Networking

FREEDM® Tight Buffer Indoor/Outdoor Cable 8F G50 MMF ClearCurve® OM4 0.9mm TB3, Cca- s1,d1,a1

CORNING

Cable Design

Fiber Count	8
Number of Ripcords	1
Outer Jacket Color	Black
Buffering Diameter	900 µm
Outer Jacket Material	Flame-retardant, non-corrosive/low-smoke, silicon-free, zero-halogen (FRNC/LSZH) material
Outer Jacket Nominal Thickness	0.8 mm
Tensile Strength Elements and/or Armoring - Layer 1	Aramid Yarn
Tight Buffer Color	Blue, Orange, Green, Brown, Slate, White, Red, Black
Tight Buffer Type	TB3 (easy strip up to 10 cm)
Flame Rating	LSZH/FRNC

Mechanical Specifications

Crush Resistance	500 N/10 cm
Max. Tensile Strength for Installation	0.6 kN
Min. Bend Radius Installation	80 mm
Min. Bend Radius Operation	67.5 mm

Optical Characteristics

Fiber Code	T
Fiber Name	G50/125 ULTRA-BEND 7.5
Fiber Type	Multimode
Fiber Core Diameter	50 µm
Minimum Effective Modal Bandwidth (EMB)	4700 MHz*km / -
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Min. Overfilled Launch (OFL) Bandwidth	3500 MHz*km / 500 MHz*km
Serial 1 Gigabit Ethernet	1100 MHz*km / 600 MHz*km
Serial 10 Gigabit Ethernet	550 MHz*km / -

**FREEDM® Tight Buffer Indoor/Outdoor Cable 8F
G50 MMF ClearCurve® OM4 0.9mm TB3, Cca-
s1,d1,a1**



Optical Characteristics	
Typical Attenuation	2,4 dB/km / 0,8 dB/km
Wavelengths	850 nm / 1300 nm
Induced Attenuation	For 7.5 mm radius < 0.2 db / -
Fiber Category	OM4

Dimensions	
Outer Diameter	4.5 mm
Cable Weight	22 kg/km
Max. cable length per reel/drum	2000 m



Equinsa Networking | eqnw@equinsa.es | eqnw.es

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2024 Corning Optical Communications. All rights reserved.