


Excel Category 6 Cable U/UTP Dca LSOH 305m Box - White

Item Code: 100-074

excel
without compromise.

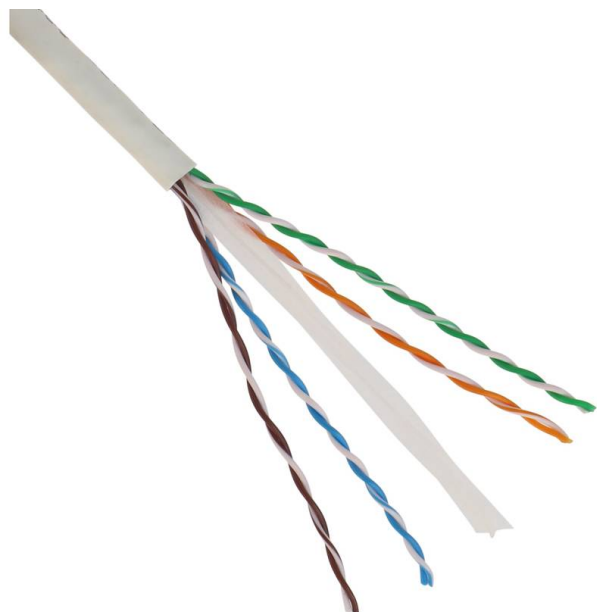

✕ Category 6

✕ Choice of colour

✕ Sequential metre markings

✕ EC Verified

✕ LSOH outer sheath

✕ Euroclass Dca-s2-d2-a1

Product Overview

Excel Category 6 Unscreened LSOH cables are manufactured and tested to the TIA/EIA 568-B.2-1, EN50173-1 and ISO/IEC 11801 Category 6 specifications. Each cable consists of 8 colour coded polyethylene insulated conductors. These are twisted together to form 4 pairs with varying lay lengths. These pairs are then formed around a central X-shaped polyethylene filler, which assists in maintaining and enhancing the cable performance.

The print legend on the cable now includes information regarding the DOP number, Test and Classification of the cable for traceability.

Product Specifications

Feature	Values
Category	6
Overall screening	None
Conductor screening	None
Outer sheath colour	White
Reaction-to-fire class according to EN 13501-6	Dca
Smoke development class according to EN 13501-6	s2
Euro class flaming droplets/particles according to EN 13501-6	d2
Euro class acidity according to EN 13501-6	a1
AWG-size	23

Equinsa
Networking

Excel Category 6 Cable U/UTP Dca LS0H 305m Box - White

Item Code: 100-074




Specification core insulation	PE
Core identification	Colour
Outer sheath material	Copolymer
Flame retardant	In accordance with EN 60332-1-2 and EN 50399
Outer diameter approx.	6.2 mm
Installation Temperature Range	0...60 °C
Operating Temperature Range	-20...75 °C
NVP value	69 %
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Conductor surface	Bare

Cable specifications

Features	Values
Dielectric strength	1200 V dc or 850 V ac
Maximum Pulling Load	60N/6.1KgF
MBR during installation	8x cable OD
MBR installed	4x cable OD

Cross-section diagram

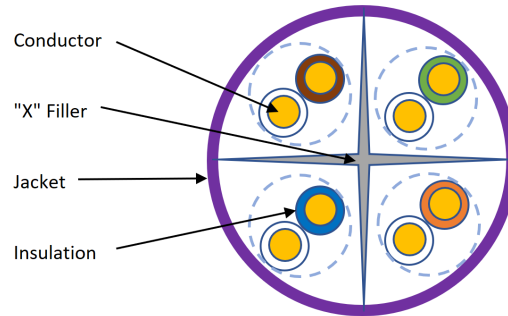

Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2009+AMD1:2012 CSV	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2011	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
BS EN 50288-6-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unshielded cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2011	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH

Excel Category 6 Cable U/UTP Dca LS0H 305m Box - White

Item Code: 100-074



measurement) and conductivity

IEC 61034-2:2005+A1:2013

Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements

EN 50575:2014 + A1:2016

Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements

RoHS

Restriction of Hazardous Substances - Compliant

Part Number Table

Part Number	Description
100-074	EXCEL CAT6 UTP CABLE BX305M-WHITE RAL9010

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.